

CABLE LADDER TYPE

STANDARD : Refer to BS EN, ASTM, E.I.T, NEMA VE1, ISO

MATERIALS : Hot Rolled Mild Steel Sheet

Stainless Steel Sheet (LS Type)

FINISHING : Painting by Electro-Static Spraying


with Epoxy/Polyester Powder Paint

Coating 60-80 μm . Thickness (LP Type)

PRE-TREATMENT Zinc Phosphate

Electroplated Zinc to BSEN 12329

Hot-Dip Galvanized Average 55-65 μm Thickness to ISO 1461 or ASIM A123/A123M (LH Type)

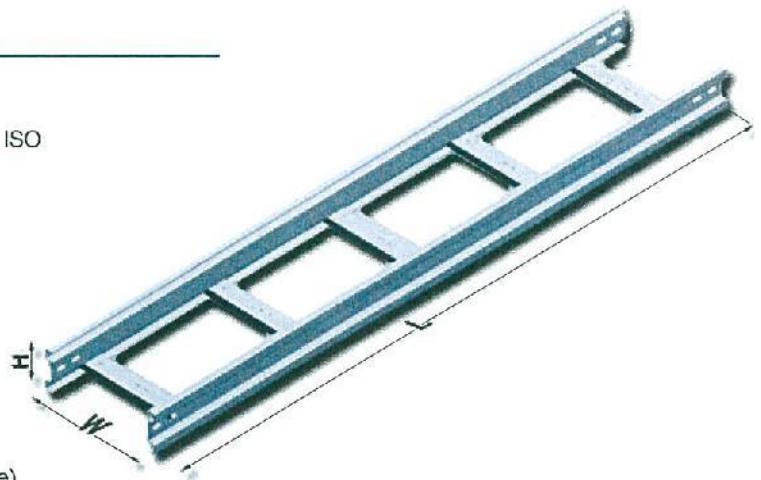



TECHNICAL DATA

TYPE (WxHxL)	Thickness (mm.)	WEIGHT(kg./m.)			BENDING STRENGTH (kg.)		
		STRAIGHT	cover		SUPPORT DISTANCE (m.)		
			T=1.6 mm.	T=2.0 mm.	1.5 m.	2.0 m.	3.0 m.
200 x 100 x 3000	2.0	6.18	2.83	3.77	1371.75	1083.00	737.05
300 x 100 x 3000	2.0	6.68	4.00	5.34	1292.85	1020.50	695.25
400 x 100 x 3000	2.0	7.18	5.17	6.91	1220.00	963.80	656.60
500 x 100 x 3000	2.0	7.68	6.34	8.48	1167.45	921.95	628.75
600 x 100 x 3000	2.0	8.18	7.51	10.05	1105.20	872.95	595.75
700 x 100 x 3000	2.0	8.68	8.68	11.62	1022.40	801.95	545.90
800 x 100 x 3000	2.0	9.18	9.85	13.19	975.45	770.75	526.95
900 x 100 x 3000	2.0	9.68	11.02	14.76	912.45	720.50	488.60
1000 x 100 x 3000	2.0	10.18	12.19	16.33	849.00	671.50	456.65

-STANDARD LENGHT : STRAIGHT = 3000 mm.
COVER = 3000 mm.



-OTHER THICKNESS OF MATERIALS
MADE BY ORDER.

90° HORIZONTAL BEND

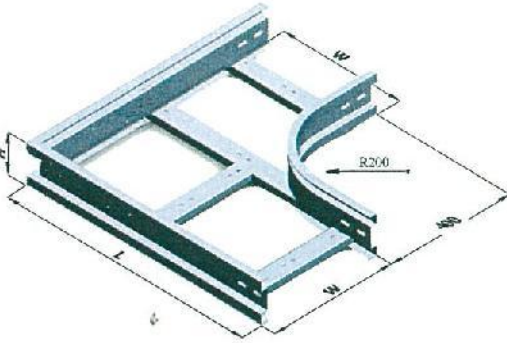



TYPE 90 HB (WxH)	THICKNESS (mm.)	FITTING	WEIGHT (kg.)	
			COVER	
			T=1.6 mm.	T=2.0 mm.
90 HB 200 x 100	2.0	6.16	3.08	4.12
90 HB 300 x 100	2.0	7.28	4.66	6.22
90 HB 400 x 100	2.0	8.99	6.48	8.64
90 HB 500 x 100	2.0	10.26	8.53	11.37
90 HB 600 x 100	2.0	12.42	10.81	14.41
90 HB 700 x 100	2.0	13.83	13.33	17.77
90 HB 800 x 100	2.0	15.25	16.09	21.45
90 HB 900 x 100	2.0	16.66	19.08	25.44
90 HB 1000 x 100	2.0	18.06	22.30	29.74

HORIZONTAL TEE

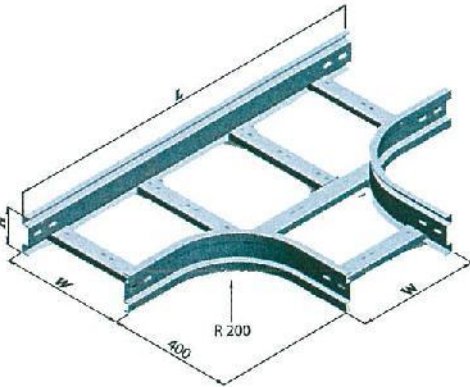


TYPE HT (WxH)	THICKNESS (mm.)	FITTING	WEIGHT (kg.)	
			COVER	
			T=1.6 mm.	T=2.0 mm.
HT 200 x 100	2.0	7.80	4.42	5.88
HT 300 x 100	2.0	9.26	6.45	8.58
HT 400 x 100	2.0	10.41	8.71	11.60
HT 500 x 100	2.0	11.57	11.20	14.94
HT 600 x 100	2.0	18.61	13.94	18.57
HT 700 x 100	2.0	14.92	16.90	22.53
HT 800 x 100	2.0	17.42	20.11	26.80
HT 900 x 100	2.0	18.87	23.54	31.38
HT 1000 x 100	2.0	20.32	27.22	36.28

90° VERTICAL OUTSIDE BEND

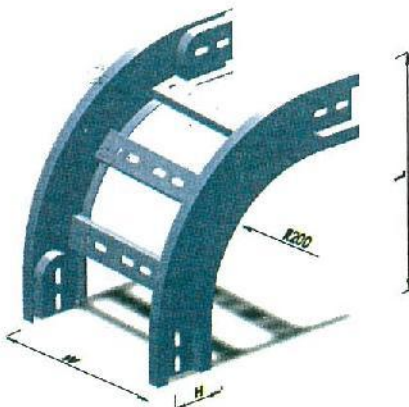


TYPE 90 VO (WxH)	THICKNESS (mm.)	FITTING	WEIGHT (kg.)	
			COVER	
			T=1.6 mm.	T=2.0 mm.
90 VO 200 x 100	2.0	4.92	2.09	2.62
90 VO 300 x 100	2.0	5.37	2.97	3.71
90 VO 400 x 100	2.0	5.82	3.85	4.80
90 VO 500 x 100	2.0	6.27	4.73	5.89
90 VO 600 x 100	2.0	6.72	5.61	6.98
90 VO 700 x 100	2.0	7.17	6.49	8.07
90 VO 800 x 100	2.0	7.62	7.37	9.16
90 VO 900 x 100	2.0	8.07	8.25	10.25
90 VO 1000 x 100	2.0	8.52	9.13	11.34

90° VERTICAL INSIDE BEND

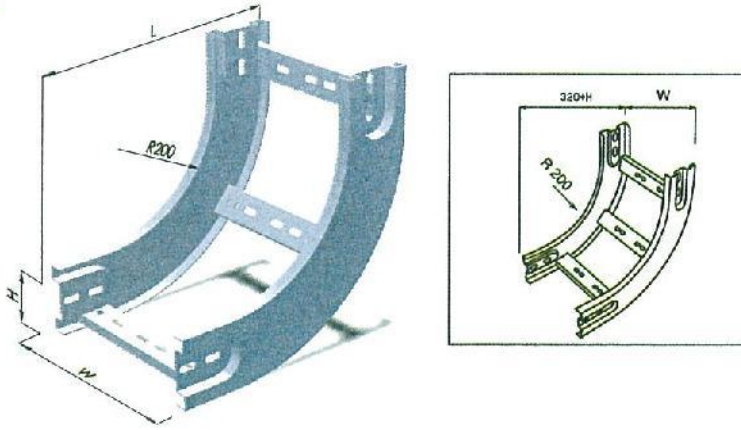


TYPE	THICKNESS (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
			T=1.6 mm.	T=2.0 mm.
90 VI 200 x 100	2.0	4.92	1.63	2.04
90 VI 300 x 100	2.0	5.37	2.31	2.88
90 VI 400 x 100	2.0	5.82	2.99	3.72
90 VI 500 x 100	2.0	6.27	3.67	4.56
90 VI 600 x 100	2.0	6.72	4.35	5.40
90 VI 700 x 100	2.0	7.17	5.03	6.24
90 VI 800 x 100	2.0	7.62	5.71	7.03
90 VI 900 x 100	2.0	8.07	6.39	7.92
90 VI 1000 x 100	2.0	8.52	7.07	8.76

HORIZONTAL CROSS

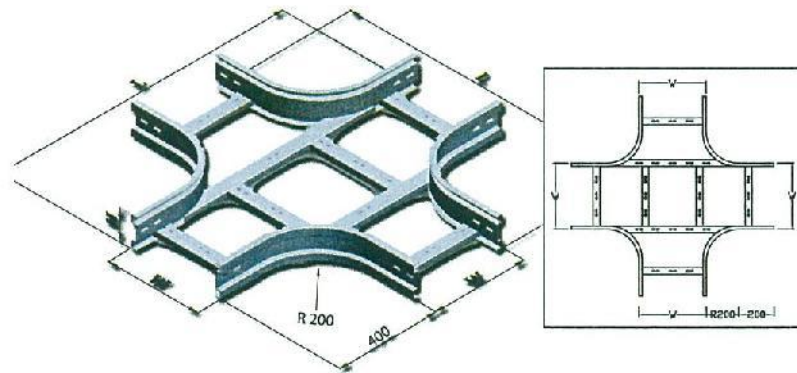

TYPE	THICKNESS (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
			T=1.6 mm.	T=2.0 mm.
HX 200 x 100	2.0	9.45	5.78	8.01
HX 300 x 100	2.0	10.94	8.49	11.31
HX 400 x 100	2.0	12.13	11.20	14.91
HX 500 x 100	2.0	13.33	14.14	18.84
HX 600 x 100	2.0	15.41	17.32	23.08
HX 700 x 100	2.0	16.76	20.73	27.64
HX 800 x 100	2.0	19.29	24.38	32.50
HX 900 x 100	2.0	20.78	28.27	37.68
HX 1000 x 100	2.0	22.27	32.39	43.18

HORIZONTAL REDUCE

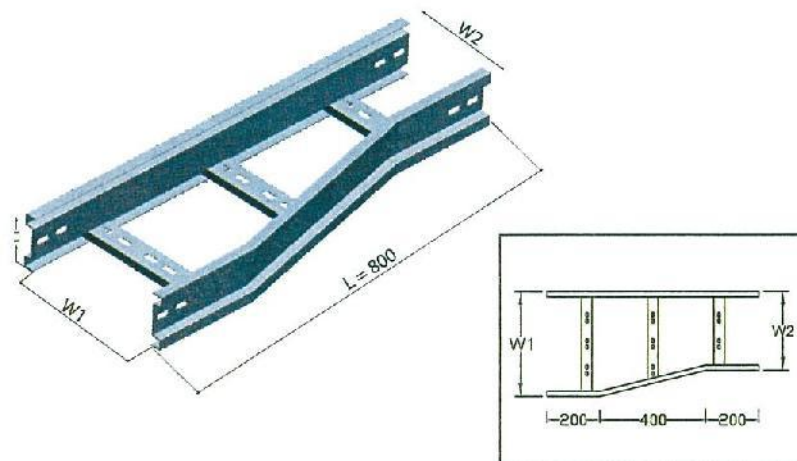

TYPE	THICKNESS (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
			T=1.6 mm.	T=2.0 mm.
HR 300,W2 x 100	2.0	5.34	2.83	3.77
HR 400,W2 x 100	2.0	5.79	3.71	5.02
HR 500,W2 x 100	2.0	6.23	4.71	6.27
HR 600,W2 x 100	2.0	6.68	5.45	7.52
HR 700,W2 x 100	2.0	7.13	6.19	8.77
HR 800,W2 x 100	2.0	7.58	6.93	10.02
HR 900,W2 x 100	2.0	8.03	7.67	11.27
HR 1000,W2 x 100	2.0	8.43	8.41	12.52

FITTING FOR CABLE TRAY

STANDARD ; Refer to BS EN, ASTM, E.I.T, NEMA VE1, ISO

MATERIALS ; Cold Rolled Mild Steel Sheet

Hot Rolled Mild Steel Sheet

Stainless Steel Sheet (VS Type)

FINISHING ; Painting by Electro-Static Spraying


✦ with Epoxy/Polyester Powder Paint

Coating 60-80 μ m. Thickness (VP Type)

PRE-TREATMENT Zinc Phosphate

Electroplated Zinc to BSEN 12329

Hot-Dip Galvanized Average 55-65 μ m Thickness to ISO 1461 or ASIM A123/A123M (LH Type)

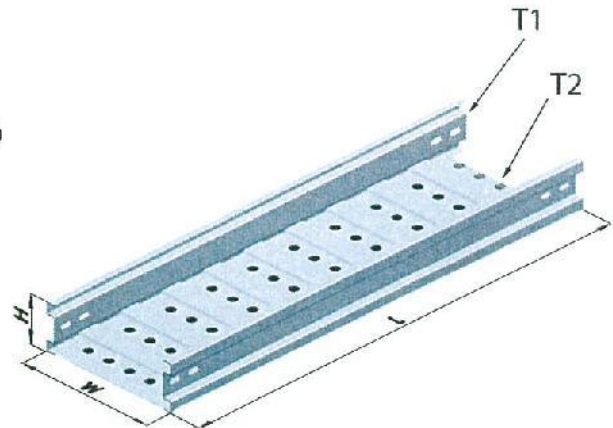



TECHNICAL DATA

TYPE (WxHxL)	Thickness T1/T2 (mm.)	WEIGHT(kg./m.)			BENDING STRENGTH (kg.)		
		STRAIGHT	cover		SUPPORT DISTANCE (m.)		
			T=1.6 mm.	T=2.0 mm.	1.5 m.	2.0 m.	3.0 m.
200 x 100 x 2440	1.6/1.2	5.52	2.83	3.77	1205.50	928.00	638.95
300 x 100 x 2440	1.6/1.2	6.34	4.00	5.34	1367.35	1079.95	726.70
400 x 100 x 2440	1.6/1.2	7.16	5.17	6.91	1450.80	1146.15	769.85
500 x 100 x 2440	1.6/1.2	7.98	6.34	8.48	1512.65	1202.10	806.45
600 x 100 x 2440	2.0/1.6	12.55	7.51	10.05	1605.20	1268.11	850.00
700 x 100 x 2440	2.0/1.6	13.78	8.68	11.62	1735.35	1370.90	919.75
800 x 100 x 2440	2.0/1.6	15.01	9.85	13.19	1842.10	1455.50	976.35
900 x 100 x 2440	2.0/1.6	16.24	11.02	14.76	1960.70	1548.95	1039.15
1000 x 100 x 2440	2.0/1.6	17.47	12.19	16.33	2065.20	1631.50	1096.55

-STANDARD LENGTH : STRAIGHT = 2440 mm.
COVER = 2440 mm.



-OTHER THICKNESS OF MATERIALS
MADE BY ORDER.

90° HORIZONTAL BEND

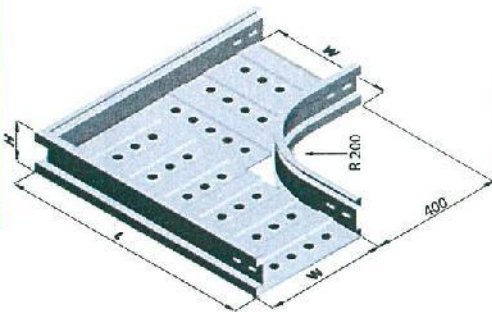



TYPE 90 HB (WxH)	THICKNESS T1/T2 (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
			T=1.6 mm.	T=2.0 mm.
90 HB 200 x 100	1.6/1.2	5.79	3.08	4.12
90 HB 300 x 100	1.6/1.2	7.25	4.66	6.22
90 HB 400 x 100	1.6/1.2	8.88	6.48	8.64
90 HB 500 x 100	1.6/1.2	10.68	8.53	11.37
90 HB 600 x 100	2.0/1.6	17.42	10.81	14.41
90 HB 700 x 100	2.0/1.6	20.58	13.37	17.77
90 HB 800 x 100	2.0/1.6	23.98	16.09	21.45
90 HB 900 x 100	2.0/1.6	27.66	19.08	25.44
90 HB 1000 x 100	2.0/1.6	31.60	22.30	29.74

HORIZONTAL TEE

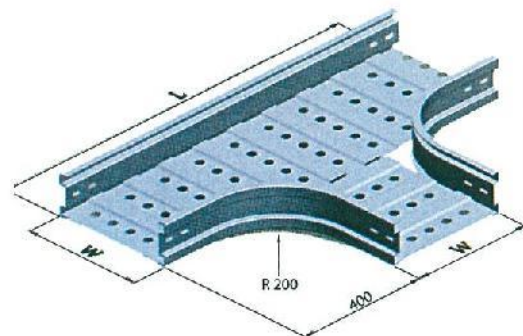


TYPE HT (WxH)	THICKNESS T1/T2 (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
			T=1.6 mm.	T=2.0 mm.
HT 200 x 100	1.6/1.2	7.91	4.42	5.87
HT 300 x 100	1.6/1.2	9.55	6.45	8.58
HT 400 x 100	1.6/1.2	11.40	8.71	19.60
HT 500 x 100	1.6/1.2	13.45	11.20	14.94
HT 600 x 100	2.0/1.6	21.30	13.94	22.53
HT 700 x 100	2.0/1.6	24.96	16.90	22.53
HT 800 x 100	2.0/1.6	28.93	20.11	26.80
HT 900 x 100	2.0/1.6	33.21	23.54	31.38
HT 1000 x 100	2.0/1.6	37.79	27.22	36.28

90° VERTICAL INSIDE BEND

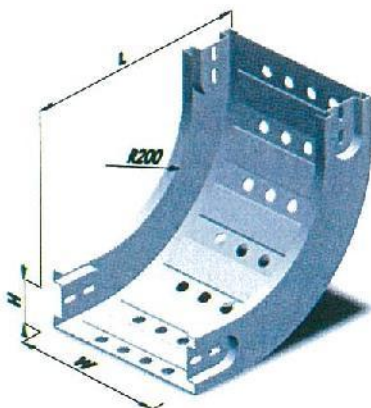


TYPE 90 VI (WxH)	THICKNESS T1/T2 (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
			T=1.6 mm.	T=2.0 mm.
90 VI 200 x 100	1.6/1.2	5.15	1.63	2.04
90 VI 300 x 100	1.6/1.2	5.72	2.31	2.88
90 VI 400 x 100	1.6/1.2	6.29	2.99	3.72
90 VI 500 x 100	1.6/1.2	6.86	3.67	4.56
90 VI 600 x 100	2.0/1.6	9.10	4.35	5.40
90 VI 700 x 100	2.0/1.6	9.95	5.03	6.24
90 VI 800 x 100	2.0/1.6	10.79	5.71	7.08
90 VI 900 x 100	2.0/1.6	11.63	6.39	7.92
90 VI 1000 x 100	2.0/1.6	12.47	7.07	8.76

90° VERTICAL OUTSIDE BEND

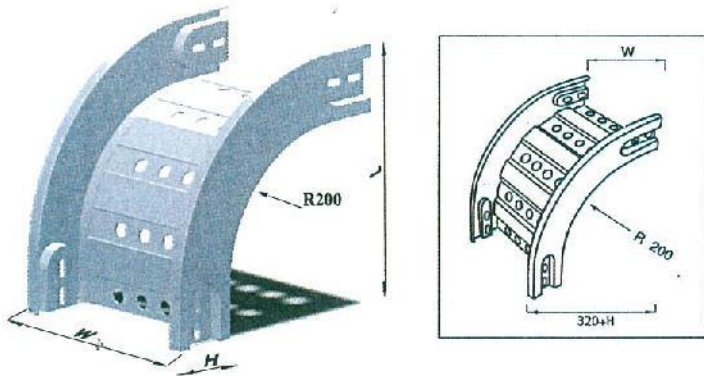


TYPE	THICKNESS T1/T2 (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
90VO (WxH)			T=1.6 mm.	T=2.0 mm.
90VO 200 x 100	1.6/1.2	4.90	2.09	2.62
90VO 300 x 100	1.6/1.2	5.34	2.97	3.71
90VO 400 x 100	1.6/1.2	5.78	3.85	4.80
90VO 500 x 100	1.6/1.2	6.22	4.37	5.89
90VO 600 x 100	2.0/1.6	7.98	5.61	6.98
90VO 700 x 100	2.0/1.6	8.64	6.49	8.07
90VO 800 x 100	2.0/1.6	9.30	7.37	9.16
90VO 900 x 100	2.0/1.6	9.96	8.25	10.25
90VO 1000 x 100	2.0/1.6	10.62	9.13	11.34

HORIZONTAL CROSS

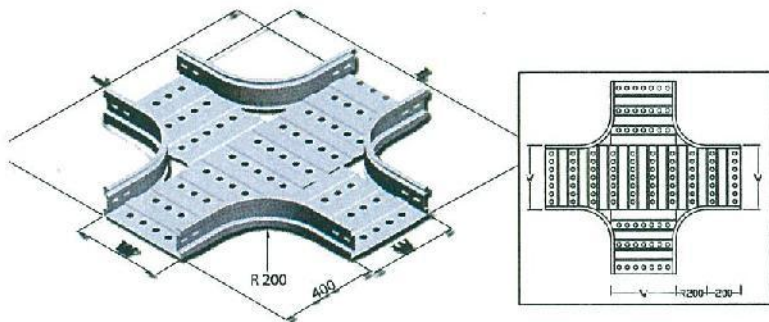

TYPE	THICKNESS T1/T2 (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
HX (WxH)			T=1.6 mm.	T=2.0 mm.
HX 200 x 100	1.6/1.2	10.34	5.78	8.01
HX 300 x 100	1.6/1.2	12.14	8.49	11.31
HX 400 x 100	1.6/1.2	14.14	11.20	14.91
HX 500 x 100	1.6/1.2	16.35	14.14	18.84
HX 600 x 100	2.0/1.6	24.46	17.32	23.08
HX 700 x 100	2.0/1.6	28.38	20.73	27.64
HX 800 x 100	2.0/1.6	32.61	24.38	32.50
HX 900 x 100	2.0/1.6	37.14	28.27	37.68
HX 1000 x 100	2.0/1.6	41.98	32.39	43.18



HORIZONTAL REDUCE

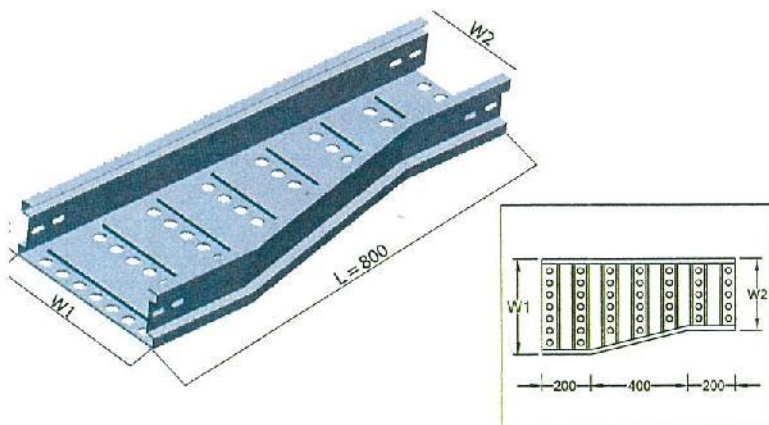



TYPE	THICKNESS T1/T2 (mm.)	WEIGHT (kg.)		
		FITTING	COVER	
HR (W1,W2x100)			T=1.6 mm.	T=2.0 mm.
HR 300,W2 x 100	1.6/1.2	4.80	2.83	3.77
HR 400,W2 x 100	1.6/1.2	5.45	3.77	5.02
HR 500,W2 x 100	1.6/1.2	6.10	4.71	6.27
HR 600,W2 x 100	2.0/1.6	6.55	5.45	7.52
HR 700,W2 x 100	2.0/1.6	10.58	6.19	8.77
HR 800,W2 x 100	2.0/1.6	11.56	6.93	10.02
HR 900,W2 x 100	2.0/1.6	12.54	7.67	11.27
HR 1000,W2 x 100	2.0/1.6	13.52	8.41	12.52

ACCESSORIES



FLANGE END

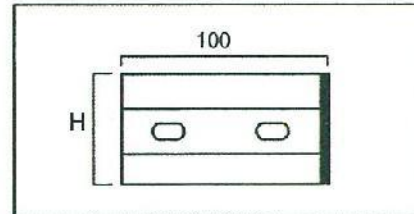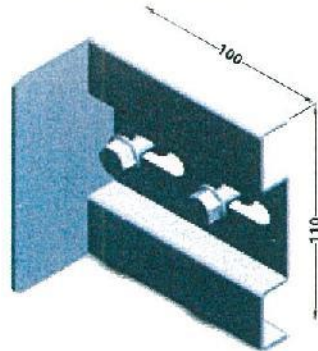



SPLICE PLATE

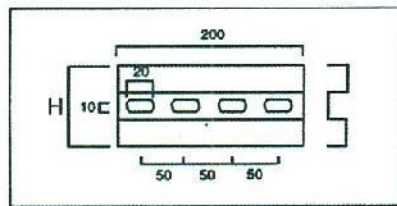



END CAP




HORIZONTAL ADJUSTABLE

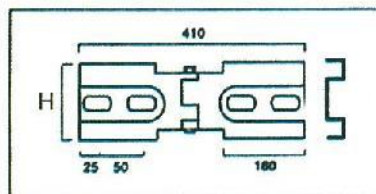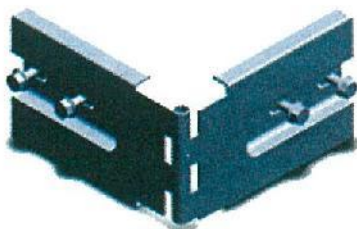

VERTICAL ADJUSTABLE

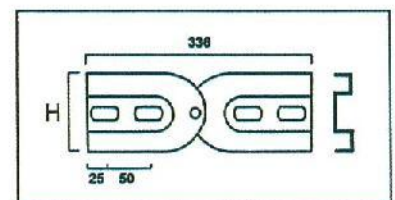





BRACKET SUPPORT

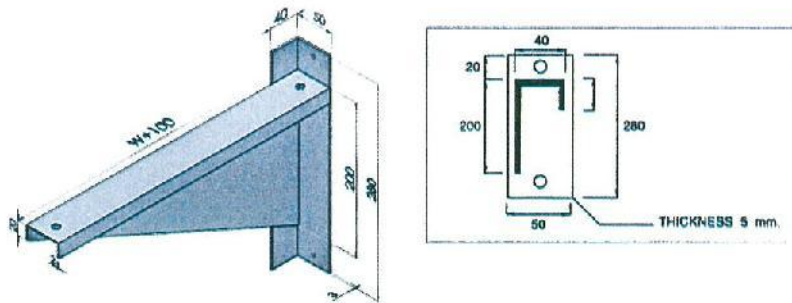

ACCESSORIES




U-CHANNEL (FOR J-LOCK)

HOLD DOWN CLAMP

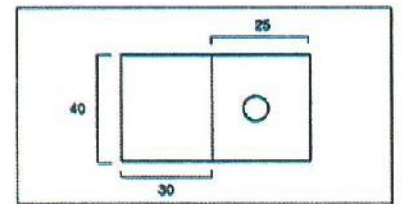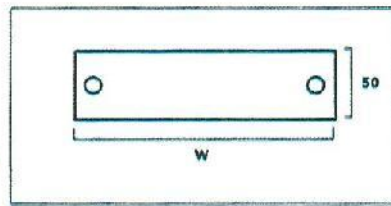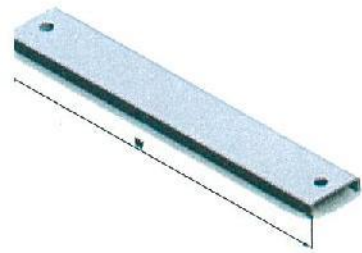

INSTALLATION

J-LOCK

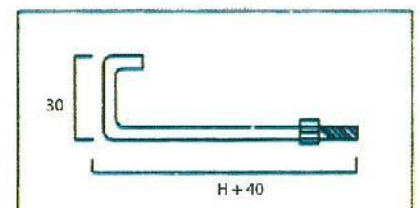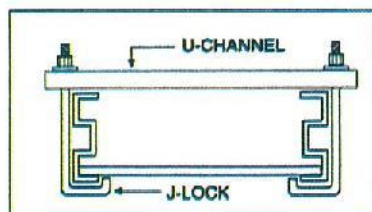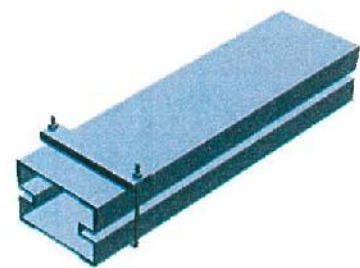

STEEL WIREWAY WITH COVER

STANDARD ; Refer to BS EN, ASTM, E.I.T, NEMA VE1, ISO

- MATERIALS** ;
- Cold Rolled Mild Steel Sheet
 - Hot Rolled Mild Steel Sheet
 - Galvanized Steel Sheet (WG Type)
 - Aluzinc Steel Sheet (WAL Type)
 - Stainless Steel Sheet (WS Type)

FINISHING ; Painting by Electro-Static Spraying


with Epoxy/Polyester Powder Paint

Coating 60-80 μ m. Thickness (WP Type)

PRE-TREATMENT Zinc Phosphate

Electroplated Zinc to BSEN 12329

Hot-Dip Galvanized Average 55-65 μ m Thickness to ASTMA 123/A123M (WH Type)


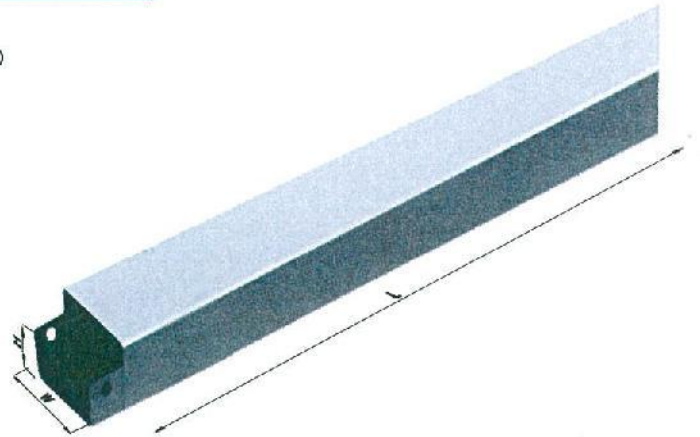


TECHNICAL DATA

TYPE (W x H x L)	BENDING STRENGTH (Kg.)											
	STEEL SHEET THICKNESS (mm.)											
	1.0			1.2			1.6			2.0		
	WEIGHT (Kg./m.)	S.D.(m.)		WEIGHT (Kg./m.)	S.D.(m.)		WEIGHT (Kg./m.)	S.D.(m.)		WEIGHT (Kg./m.)	S.D.(m.)	
1.5		2.0	1.5		2.0	1.5		2.0	1.5		2.0	
75 x 50 x 2440	2.37	276.55	221.25	2.85	370.50	296.40	3.56	583.35	452.20	4.74	906.80	687.80
100 x 50 x 2440	2.76	318.25	254.60	3.32	408.50	326.80	4.16	632.10	490.00	5.53	971.85	725.50
100 x 75 x 2440	3.16	349.50	277.40	3.79	463.35	369.35	4.73	696.30	539.00	6.31	1009.20	767.60
100 x 100 x 2440	3.55	387.00	305.00	4.26	500.80	395.20	5.32	749.95	581.35	7.10	1067.45	798.75
150 x 100 x 2440	4.33	395.00	334.40	5.20	562.00	443.70	6.33	796.30	627.00	8.78	1105.85	817.70
200 x 100 x 2440	5.12	418.00	357.20	6.14	602.15	477.90	7.68	852.95	661.20	10.24	1197.65	921.30
250 x 100 x 2440	-	-	-	7.08	645.17	514.70	8.86	884.90	696.80	11.81	1265.50	980.40
300 x 100 x 2440	-	-	-	8.02	690.97	554.88	10.04	994.45	743.65	13.38	1326.10	1012.50
350 x 100 x 2440	-	-	-	-	-	-	11.22	987.45	785.40	14.95	1377.45	1067.80
400 x 100 x 2440	-	-	-	-	-	-	12.40	1046.35	823.90	16.52	1419.95	1113.40
450 x 100 x 2440	-	-	-	-	-	-	13.58	1076.20	847.40	18.09	1482.60	1128.50
500 x 100 x 2440	-	-	-	-	-	-	14.76	1134.80	900.00	19.66	1530.70	1188.00



S.D = SUPPORT DISTANCE
WEIGHT = WITH COVER

90° HORIZONTAL BEND WITH COVER

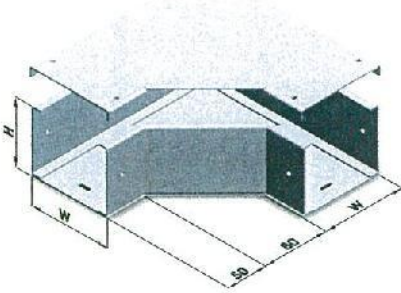



TYPE	WEIGHT (kg.)			
	THICKNESS (mm.)			
90 HB (WxH)	1.0	1.2	1.6	2.0
90 HB 75 x 50	0.35	0.42	0.56	0.70
90 HB 100 x 50	0.43	0.52	0.69	0.86
90 HB 100 x 75	0.58	0.70	0.93	1.16
90 HB 100 x 100	0.69	0.83	1.10	1.38
90 HB 150 x 100	0.96	1.16	1.51	1.89
90 HB 200 x 100	1.24	1.49	1.98	2.48
90 HB 250 x 100	-	1.89	2.62	3.15
90 HB 300 x 100	-	2.33	3.11	3.89
90 HB 350 x 100	-	-	3.77	4.72
90 HB 400 x 100	-	-	4.49	5.62
90 HB 450 x 100	-	-	5.28	6.60
90 HB 500 x 100	-	-	6.14	7.66

90° VERTICAL INSIDE BEND WITH COVER

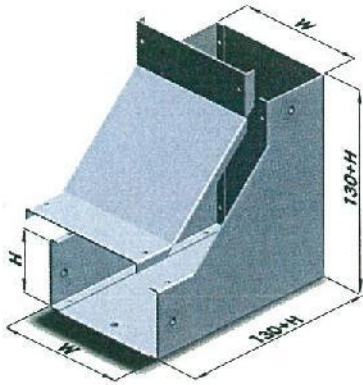



TYPE	WEIGHT (kg.)			
	THICKNESS (mm.)			
90 VI (WxH)	1.0	1.2	1.6	2.0
90 VI 75 x 50	0.70	0.84	1.13	1.49
90 VI 100 x 50	0.82	0.98	1.31	1.64
90 VI 100 x 75	1.13	1.36	1.80	2.23
90 VI 100 x 100	1.35	1.62	2.17	2.71
90 VI 150 x 100	1.62	1.94	2.60	3.35
90 VI 200 x 100	1.89	2.27	3.03	3.79
90 VI 250 x 100	-	2.60	3.46	4.33
90 VI 300 x 100	-	2.91	3.90	4.87
90 VI 350 x 100	-	-	4.33	5.42
90 VI 400 x 100	-	-	4.96	5.96
90 VI 450 x 100	-	-	5.20	6.50
90 VI 500 x 100	-	-	5.63	7.04

90° VERTICAL OUTSIDE BEND WITH COVER

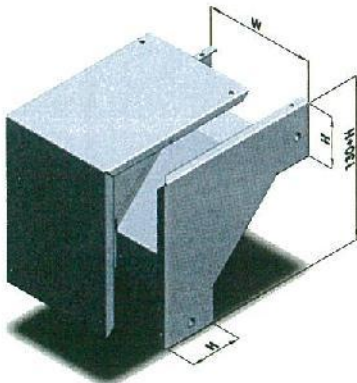



TYPE	WEIGHT (kg.)			
	THICKNESS (mm.)			
90 VO (WxH)	1.0	1.2	1.6	2.0
90 VO 75 x 50	0.70	0.84	1.13	1.49
90 VO 100 x 50	0.82	0.98	1.31	1.64
90 VO 100 x 75	1.13	1.36	1.80	2.25
90 VO 100 x 100	1.35	1.62	2.17	2.71
90 VO 150 x 100	1.62	1.94	2.60	3.35
90 VO 200 x 100	1.89	2.27	3.03	3.79
90 VO 250 x 100	-	2.60	3.46	4.33
90 VO 300 x 100	-	2.91	3.90	4.87
90 VO 350 x 100	-	-	4.33	5.42
90 VO 400 x 100	-	-	4.76	5.96
90 VO 450 x 100	-	-	5.20	6.50
90 VO 500 x 100	-	-	5.63	7.04

HORIZONTAL TEE WITH COVER

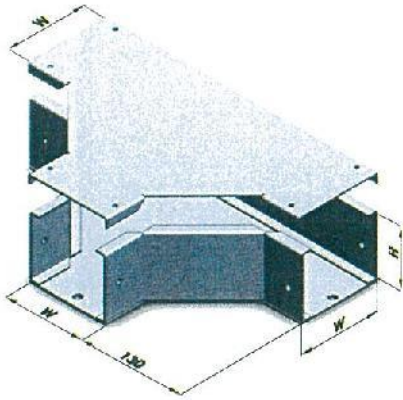



TYPE HT (WxH)	WEIGHT (kg.)			
	THICKNESS (mm.)			
	1.0	1.2	1.6	2.0
HT 75 X 50	1.31	1.57	2.09	2.62
HT 100 X 50	1.55	1.87	2.48	3.10
HT 100 X 75	1.76	2.11	2.82	3.53
HT 100 X 100	1.94	2.33	3.10	3.87
HT 150 X 100	2.49	2.99	3.99	4.98
HT 200 X 100	3.12	3.74	4.99	6.25
HT 250 X 100	-	4.50	6.00	7.50
HT 300 X 100	-	5.44	7.25	9.08
HT 350 X 100	-	-	8.65	10.84
HT 400 X 100	-	-	10.16	12.70
HT 450 X 100	-	-	11.80	14.75
HT 500 X 100	-	-	13.57	16.96

HORIZONTAL CROSS WITH COVER

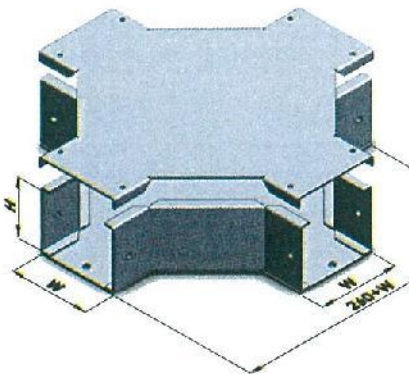



TYPE HX (WxH)	WEIGHT (kg.)			
	THICKNESS (mm.)			
	1.0	1.2	1.6	2.0
HX 75 X 50	1.80	2.16	2.88	3.60
HX 100 X 50	2.08	2.50	3.32	4.15
HX 75 X 75	2.37	2.84	3.79	4.74
HX 100 X 100	2.57	3.08	4.11	5.14
HX 150 X 100	3.18	3.82	5.08	6.35
HX 200 X 100	3.86	4.65	6.17	7.72
HX 250 X 100	-	5.35	7.13	8.91
HX 300 X 100	-	6.35	8.47	10.59
HX 350 X 100	-	-	9.94	12.43
HX 400 X 100	-	-	11.54	14.42
HX 450 X 100	-	-	13.26	16.57
HX 500 X 100	-	-	15.16	18.88

HORIZONTAL REDUCE WITH COVER

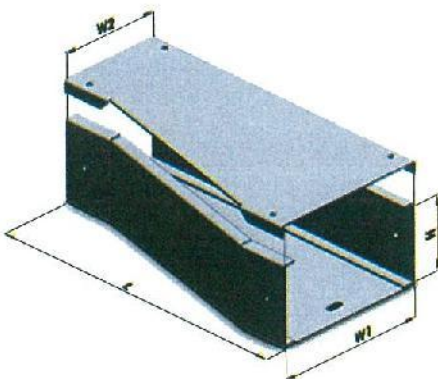



TYPE HR (WxH)	WEIGHT (kg.)			
	THICKNESS (mm.)			
	1.0	1.2	1.6	2.0
HR 100, 75 X 50	0.54	0.65	0.81	1.08
HR 150, 100 X 100	0.85	1.02	1.28	1.70
HR 200, W2 X 100	1.00	1.20	1.50	2.00
HR 250, W2 X 100	-	1.31	1.75	2.33
HR 300, W2 X 100	-	1.50	2.00	2.66
HR 350, W2 X 100	-	-	2.25	2.99
HR 400, W2 X 100	-	-	2.50	3.52
HR 450, W2 X 100	-	-	2.75	3.61
HR 500, W2 X 100	-	-	3.00	3.97

FLANGE END





TYPE FE (WxH)	WEIGHT (kg.)			
	THICKNESS (mm.)			
	1.0	1.2	1.6	2.0
FE 50	0.08	0.10	0.13	0.16
FE 75	0.09	0.11	0.14	0.18
FE 100	0.10	0.12	0.15	0.20
FE 150	0.11	0.13	0.16	0.22

CONNECTOR





TYPE WC (WxH)	WEIGHT (kg.)			
	THICKNESS (mm.)			
	1.0	1.2	1.6	2.0
WC 75 X 50	0.09	0.11	0.15	0.18
WC 100 X 50	0.11	0.13	0.17	0.22
WC 100 X 75	0.12	0.14	0.20	0.25
WC 100 X 100	0.14	0.17	0.23	0.29
WC 150 X 100	0.18	0.22	0.28	0.35
WC 200 X 100	0.21	0.25	0.33	0.41
WC 250 X 100	-	0.28	0.38	0.48
WC 300 X 100	-	0.32	0.43	0.54
WC 360 X 100	-	-	0.48	0.60
WC 400 X 100	-	-	0.53	0.66
WC 450 X 100	-	-	0.58	0.72
WC 500 X 100	-	-	0.63	0.78

END CAP



TYPE EC (WxH)	WEIGHT (kg.)			
	THICKNESS (mm.)			
	1.0	1.2	1.6	2.0
EC 75 X 50	0.06	0.07	0.09	0.12
EC 100 X 50	0.07	0.08	0.11	0.14
EC 100 X 75	0.10	0.12	0.17	0.21
EC 100 X 100	0.14	0.16	0.22	0.27
EC 150 X 100	0.18	0.22	0.29	0.36
EC 200 X 100	0.22	0.26	0.35	0.43
EC 250 X 100	-	0.31	0.41	0.50
EC 300 X 100	-	0.35	0.47	0.57
EC 350 X 100	-	-	0.52	0.64
EC 400 X 100	-	-	0.59	0.71
EC 450 X 100	-	-	0.65	0.78
EC 500 X 100	-	-	0.71	0.84

HANGER SUPPORT



TYPE HS-WP (WxH)	THICKNESS (mm.)	WEIGHT (kg.)
HS-WP 75 X 50	2.00	0.18
HS-WP 100 X 50	2.00	0.23
HS-WP 100 X 75	2.00	0.25
HS-WP 100 X 100	2.00	0.28
HS-WP 150 X 100	2.00	0.32
HS-WP 200 X 100	2.00	0.37